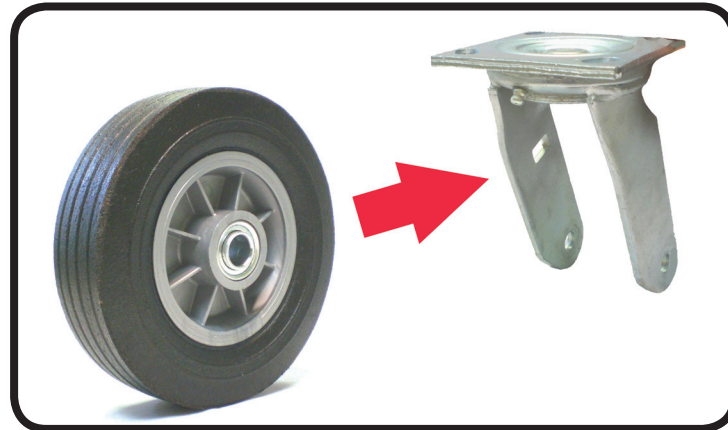


VSP™ Wheels Wheels for Casters for Caster Rigs

Flat-free, puncture proof, alternative to pneumatics –
in hub lengths designed for good fit in caster yokes



Product numbers listed in highlighted boxes					
BORE LENGTH & TYPE	2-1/2" CENTERED		3" CENTERED	3-1/4" CENTERED	VSP Load Rating lbs
BEARINGS	Roller Bearing	Ball Bearing	Ball Bearing	Ball Bearing	
BORE SIZES	1/2"	1/2"	1/2"	1/2"	
Nominal Wheel Sizes	VSP™ wheels for use in STANDARD-SIZE top plate caster rigs (include spanner bushing for best spacing in caster fork)				
6" x 2" (Tread = 1.25")	642.163.1336ZSP	674.163.1330SP			350
8" x 2" (Tread = 1.5")	642.207.1336ZSP	674.207.1330SP			440
Nominal Wheel Sizes	For PNEUMATIC-SIZE (wider fork) top plate caster rigs (include 2 "top hat" bushings for best spacing in caster fork)				
8" x 2-1/2" (Tread = 2.0")			675.208.1330TH		450
10" x 3" (Tread = 2.75")				649.256.1330TH	550

Available in HD (Heavy Duty) bearing and in SB (precision flanged ball bearing)

VSP™ Wheels with Caster Rigs

Casters










Flat-free, VSP Wheels in top plate casters
350 – 550 lbs Capacity

Caster rig is zinc plated, forged steel,
top plate fitting

Swivel is double race, greased, with head seal



Product numbers listed in highlighted boxes

 4.5" x 4" (115 mm x 100 mm)		Hole Diameter 3/8" (9.5mm)		 2.6" – 3" x 3" – 3.6" (67 – 76 mm x 76 – 92 mm)			
 Diameter	 Overall Height	 Offset	 Nominal Load Capacity	 Swivel	 Rigid	 Between Forks	VSP Load Rating lbs
40 Series Casters – Standard Rig – Ball Bearings							
6" x 2" (Tread = 1.25")	7-11/16"	1-11/16"	350 lbs	160.6743	560.6743	2-1/2"	350
8" x 2" (Tread = 1.5")	9-1/4"	2-1/4"	440 lbs	160.6744	560.6744	2-1/2"	440
40 Series Casters – Standard Rig – Roller Bearings							
6" x 2" (Tread = 1.25")	7-11/16"	1-11/16"	350 lbs	160.6423	560.6423	2-1/2"	350
8" x 2" (Tread = 1.5")	9-1/4"	2-1/4"	440 lbs	160.6424	560.6424	2-1/2"	440
40 Series Casters — Pneumatic Rig (wider fork) — Ball Bearings							
8" x 2.5" (Tread = 2.0")	9-1/4"	2-1/4"	450 lbs	450.6754	550.6754	3"	450
10" x 3" (Tread = 2.75")	11-13/16"	3-1/8"	650 lbs	450.6495	550.6495	4"	550